

NORTH AMERICA PRODUCT LINE CATALOG

Manufacturer of Machines and Tools for Pipe Working

REMS

for Professionals

since
1909



QUALITY PASSED

ON GENERATIONS



REMS GMBH & CO KG

Since 1909

Since its foundation in 1909 REMS has been developing products for pipe working, especially for plumbing and heating installers. Initially, hand tools, then subsequently machines, and electric and battery powered tools. The stipulation of the company founder Christian Föll "REMS must be superior" has always been the benchmark for our actions. Today, REMS is a leading manufacturer of machines and tools for pipe working and is available in over 100 countries.

German Quality Product

Our production plant is located in Waiblingen near Stuttgart, in the center of Germany's high-tech industrial region. World class equipment and facilities are utilized for research and development, production, and quality control. In addition, there is a very long tenured staff of highly qualified employees, who in part represent the 4th generation of service at REMS.

Through many years of experience and education they have acquired a special level of knowledge and expertise and implemented systems that are essential for manufacturing quality products.

Market Strength

REMS' basis for market strength is technically advanced and high-quality products as well as a product range tightly concentrated on high turnover units and highly competitive prices thanks to the rational, efficient in-house production. Thousands of delighted customers happily come back for more. Their satisfaction speaks volumes, a testament to our commitment to quality and service. Join them and experience the joy of being a REMS customer!

Technical Advantage

REMS products are highly valued because of their innovative technology as well as their high standards of quality and are used all over the globe. REMS maintains its position at the forefront of technical progress because of its innovative products. Many national and international patents validate this. An important cornerstone for the quality and durability of REMS tools is laid in our own heat treatment shop where we use proprietary processes. Many decades of experience have provided important knowledge and along with the best in German engineering contribute to the secrets of REMS quality tools.

REMS

for Professionals





TEAL CORPORATION

Strong business relationship with REMS

TEAL has very successfully maintained its business relationship with REMS for many years. We at REMS are proud to have TEAL as a great official main importer of REMS tools in North America.

Service and technical advice

For any question or REMS tool need TEAL is your contact. Tool service and maintenance are executed quickly and efficiently with the highest grade of customer satisfaction. The team at TEAL is highly responsive and with the full support of the REMS headquarters in Germany will be happy to answer any question. You are quickly able to speak directly with a human and avoid aggravating and seemingly endless menus.

Stock and fast shipments

TEAL is constantly monitoring stock of all products including accessories and spare parts. We understand the impact of down time and orders generally ship the same day so there is no delay in receiving your product.

Industry experience

TEAL's employees have decades of experience serving the fields of plumbing, heating, HVAC, and industry as well as many others which helps us serve the demands of the markets. We draw on this expertise to do our very best to recommend suitable solutions for your needs. We never, ever lose sight of the fact that we are here to serve our customers!



LET'S GET SOCIAL



FOLLOW US

LIKE US

TAG US

#inlovewithyellow ✓
#teamrems



@remstools
@remstoolsusa



@remstools



@remstools



@remstools



Operating instructions

Parts lists

Product information

On the building site or at your dealer: All operating instructions, parts lists, product information, product films and more can be called upon immediately. Many other functions are also available to you.

REMS App

Free application software from the Apple App Store or Android App at Google Play.



Content



**Threading
Roll Grooving**

6



**Radial Press Jointing
Expanding, Extracting**

14



Sawing

28



**Cutting
Deburring**

30



**Flushing
Filling
Cleaning**


**Testing
Freezing**

38



Bending

42

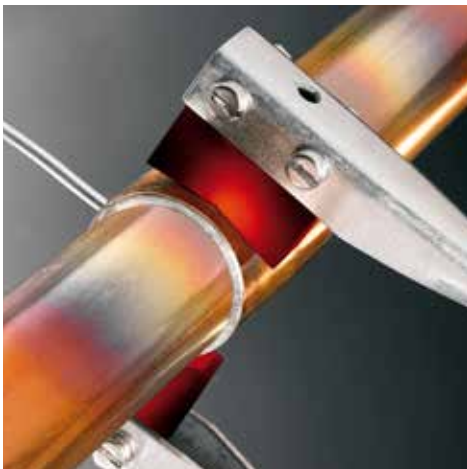

Soldering

48



**Pipe and Drain Inspection
Pipe and Drain Cleaning**

50



**Diamond Core Drilling
REMS General Accessories**

52

HAND THREADING



REMS Dies - The proven REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

REMS eva

the die stock for professionals!

- Quality hand die stock
- Excellent start-cutting and threading
- Almost indestructible REMS quality dies
- Only one type of quick-change die heads



German Quality Product

REMS eva	Art.-No.
Set NPT ½", ¾", 1", 1½"	520065
Set NPT ½", ¾", 1", 1½", 2"	520067
Ratchet lever	522000

REMS Amigo

The smallest, lightest and strongest!



REMS Amigo 22V Set NPT 1/2", 3/4", 1"

German Quality Product



Powerful, easy-to-operate electric tool for effortless threading with unique support bracket that absorbs all torque. Ready for use anywhere, without vice. Ideal for repair, renovation, job site.



REMS Amigo Set NPT 1/2", 3/4", 1"



REMS Amigo 2 Set
NPT 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"



REMS Amigo 2 Compact Set
NPT 1/2", 3/4", 1", 1 1/4"



REMS Amigo 2 Compact Set
NPT 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"

Description	Weight drive unit	Power (110V)	Workload	Art.-No.
REMS Amigo 22V Set NPT 1/2", 3/4", 1" In sturdy steel case	12.3 lbs	500 W / 4.2 Amps output	Pipe threads 1/8-1", bolt threads 1/4-1"	530018
REMS Amigo Set NPT 1/2", 3/4", 1" In sturdy steel case	7.7 lbs	1200 W / 10 Amps	Pipe threads 1/8-1", bolt threads 1/4-1"	530024
REMS Amigo 2 Set NPT 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" In sturdy steel case	14.3 lbs	1700 W / 16 Amps	Pipe threads 1/8-2", bolt threads 1/4-1"	540021
REMS Amigo 2 Compact Set NPT 1/2", 3/4", 1", 1 1/4" In sturdy steel case	10.8 lbs	1200 W / 10 Amps	Pipe threads 1/8-2", bolt threads 1/4-1"	540026
REMS Amigo 2 Compact Set NPT 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" In sturdy steel case	10.8 lbs	1200 W / 10 Amps	Pipe threads 1/8-2", bolt threads 1/4-1"	540027



Quick-change die heads

For REMS eva, REMS Amigo,
REMS Amigo 2, REMS
Amigo 2 Compact and others



German Quality Product

Description	Art.-No.
NPT 1/8"	521200
NPT 1/4"	521210
NPT 3/8"	521220
NPT 1/2"	521230
NPT 3/4"	521240
NPT 1"	521250
NPT 1 1/4"	521260
NPT 1 1/2"	521270
NPT 2"	521280

Quick-change die heads for other threads available.

THREADING MACHINES



REMS Tornado

A class of its own!

- Only 1 universal automatic die head from 1/16"-2" for all threads
- Automatic lubrication and cooling
- Automatic chuck
- Large oil basin and chip tray
- Maintenance-free gear
- Choice of 3 motors
- Easy to carry, drive unit only 77 lbs



Automatic chuck

German Quality Product



Tornado 2000



Tornado 2010 T

REMS Tornado*	Stand	Motor	Weight	Power (110 V)	Speed	Workload	Included Tooling	Art.-No.
2000	3 tubular legs	Universal	77 lbs	1700 W / 16 Amps	53 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340200
2000 T*	see accessories	Universal	77 lbs	1700 W / 16 Amps	53 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340206
2010 T*	see accessories	Capacitor	100 lbs	2100 W / 19 Amps	2 spindle speeds 52 and 26 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340207

*Three different stand options are available as accessories

Accessories	Art.-No.
Stand	344105
Wheelstand with material shelf	344100
Collapsible wheel stand	344150

REMS Magnum

The super machine up to 4"!

- Universal automatic die head from 1/4"-2" and from 2 1/2"-4" for all threads
- Exceptionally round and clean threads up to 4" by using 6 threading dies
- Automatic lubrication and cooling
- Proven quick-action hammer chuck
- Large oil basin and chip tray
- Maintenance-free gear
- L-T = Light Tray and Oil basin / T = Big Tray and Oil basin



Magnum 2010 L-T



Magnum 2000 L-T



Magnum 4000 T



German Quality Product

REMS Magnum*	Motor	Weight	Power (110V)	Speed	Workload	Included Tooling	Art.-No.
2000 T	Universal	177 lbs	1700 W / 16 Amps	53 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340220
2010 T	Capacitor	204 lbs	2100 W / 19 Amps	30 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340221
2000 L-T	Universal	150 lbs	1700 W / 16 Amps	53 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340226
2010 L-T	Capacitor	170 lbs	2100 W / 19 Amps	30 rpm	Pipe threads (1/16) 1/8-2", Bolt threads 1/4-2"	NPT 1/2-2"	340227
REMS Magnum 3" available on special order.							
4000 T	Universal	224 lbs	1700 W / 16 Amps	23 rpm	Pipe threads (1/8) 1/2-4", Bolt threads 1/2-2"	NPT 1/2-4"	380429
4020 T	3-Phase 220V / 60 Hz	240 lbs	2000 W / 10 Amps	2 spindle speeds 24 and 12 rpm	Pipe threads (1/8) 1/2-4", Bolt threads 1/2-2"	NPT 1/2-4"	380431

*Three different stand options are available as accessories

Accessories	Art.-No.
Stand	344105
Wheel stand with material shelf	344100
Collapsible wheel stand	344150



REMS Nippelfix

- Super fast and simple
- For threading machines with opening die head
- Automatic quick-chuck
- Production of nipples possible



German Quality Product

REMS Nippelfix	Art.-No.
1/2"	111000
3/4"	111100
1"	111200
1 1/4"	111300
1 1/2"	111400
2"	111500

THREADING MACHINES



REMS Unimat

The high-performance machine for bolt and pipe threads!

- Only one universal automatic die head with automatic opening and closing
- Tangential-chaser-threading-system
- Large threading range
- Fast working, short resetting time
- For single and series production



Unimat 75



Unimat 77

Scan for detailed information

German Quality Product

REMS Unimat 75	Weight	Power (230V / 3 Ph.)	Speed	Workload	Art.-No.
Basic mS with manual clamping device	476 lbs	2000 / 2300 W	2 spindle speeds 70 and 35 rpm	Bolt threads ¼ – 2¾", Pipe threads ¼ ₁₆ – 2½"	750003
Basic pS with hydraulic/pneumatic clamping device	482 lbs	2000 / 2300 W	2 spindle speeds 70 and 35 rpm	Bolt threads ¼ – 2¾", Pipe threads ¼ ₁₆ – 2½"	750004
Basic pS with hydraulic/pneumatic clamping device and reamer assembly	482 lbs	2000 / 2300 W	2 spindle speeds 70 and 35 rpm	Bolt threads ¼ – 2¾", Pipe threads ¼ ₁₆ – 2½"	750005

REMS Unimat 77	Weight	Power (230V / 3 Ph.)	Speed	Workload	Art.-No.
Basic mS with manual clamping device	478 lbs	2000 / 2300 W	4 spindle speeds 50, 25, 16, 8 rpm	Pipe threads ¼ – 4"	770003
Basic pS with hydraulic/pneumatic clamping device	534 lbs	2000 / 2300 W	4 spindle speeds 50, 25, 16, 8 rpm	Pipe threads ¼ – 4"	770004

Chasers and holders for many threads available. Machines are supplied to order. Ask for detailed technical information.

THREADING ACCESSORIES

REMS Spezial

The proper thread-cutting oil! With high lubricating and cooling effect!

- Also well suited as a cooling lubricant for sawing metals
- High-alloyed mineral based thread-cutting oil
- Can be washed out with water



German Quality Product

REMS Spezial	Art.-No.
Can 5 l (1.32 Gal.)	140100
Can 10 l (2.64 Gal.)	140101
Spray 600 ml (21.2 oz.)	140105
Squirt bottle 500 ml (17.6 oz.)	140106

REMS Nippelspanner

- To be used universally for threading machines and die stocks
- Manual internal clamping
- Compatible with all Amigos plus threaders of other makes



German Quality Product

REMS Nippelspanner	Art.-No.
½"	110100
¾"	110200
1"	110300
1¼"	110400
1½"	110500
2"	110600
Set ½ – 1¼"	110620
Set ½ – 2"	110621

REMS REG St

Electric deburring!

- Double edges for optimum chip flow
- Drive through electric die stock with octagonal seat, e.g. REMS Amigo, REMS Amigo 22V, REMS Amigo 2, REMS Amigo 2 Compact



German Quality Product

Description	Art.-No.
REMS REG St ¼–2"	731700

ROLL GROOVING



REMS Drive Selection - Only one roll grooving device compatible with all REMS Amigo drive units, REMS Tornado and REMS Magnum. Fast, simple assembly. 3-face drive shaft of roll grooving attachment for secure clamping and optimum power transmission.

REMS Collum

Electrical roll grooving up to 12".

- Fast and economical feed of the pressure roller with oil-hydraulic pressure cylinder
- 1-6" (sched. 40), 8-12" (sched. 20)
- Portable, compact, light weight
- Maintenance free gear
- Choice of 4 drive units



German Quality Product

Description	Weight	Power (110V)	Speed	Workload	Art.-No.
REMS Collum	62 lbs	1200 W / 10 Amps	27-20 rpm	Steel pipes 1-12", s ≤ 7.2 mm	347006
REMS Collum 2	70 lbs	1700 W / 16 Amps	27-20 rpm	Steel pipes 1-12", s ≤ 7.2 mm	347008
REMS Collum 2 Compact	63 lbs	1200 W / 10 Amps	27-20 rpm	Steel pipes 1-12", s ≤ 7.2 mm	347009
REMS Collum 22 V	68 lbs	500 W / 4.2 Amps	27-20 rpm	Steel pipes 1-12", s ≤ 7.2 mm	347005

Accessories	Art.-No.
Stand	849315
Wheel stand	849310
Foot switch with coupling	347010

REMS roll grooving attachment

Compact – universal!

- Proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and a precise grooving
- Grooving rollers easily interchangeable
- Built-in ring gauge for pre-setting of groove depth
- Only one roll grooving attachment for REMS Magnum and REMS Tornado



German Quality Product

Description		Art.-No.
REMS roll grooving attachment	For REMS Magnum, REMS Tornado	347000
REMS roll grooving attachment R 300	For Ridgid 300	347001
REMS roll grooving attachment R 535	For Ridgid 535	347002



Accessories*		Art.-No.
Grooving rollers 1-1½" (pair)	For steel pipes	347030
Grooving rollers 2-6" (pair)	For steel pipes	347035
Grooving rollers 8-12" (pair)	For steel pipes	347040

Rollers for copper or stainless steel on request.

RADIAL PRESS JOINTING – MINI TOOLS



Introducing the REMS Mini-Press 22V - the compact, powerful radial press tool. With its cutting-edge design and 22V battery, it delivers reliable connections quickly and effortlessly. Experience efficiency and precision in one portable package.

REMS Mini-Press 22 V ACC / REMS Mini-Press S 22 V ACC

One-hand radial presses!

Universal up to $\varnothing 1 \frac{1}{4}$ ". Super-light. Super-small. Super-handly. Super-fast. 360° rotatable. Li-Ion 21.6V, 2.5Ah battery for approx. 390 pressings Viega ProPress $\frac{1}{2}$ " per battery charge. Pressing in under 4 s. Automatic circuit control.



Why "mini"?

Drive unit REMS Mini-Press 22V ACC with pressing tongs installed has an 'overall length' of less than 33 cm/13.0". Therefore crimping also possible in particularly tight areas.



REMS Mini-Press 22V ACC

German Quality Product

REMS Mini-Press S 22V ACC



Steel case



L-Boxx



REMS Mini-Press 22V ACC	Weight drive unit	Power (110V)	Force	Working Range	Art.-No.
Basic-Pack In sturdy steel case	5.5 lbs	380 W / 3.5 Amps	22 kN	$\varnothing \frac{3}{8} - 1 \frac{1}{4}$ "	578010
Basic-Pack In L-Boxx system case	5.5 lbs	380 W / 3.5 Amps	22 kN	$\varnothing \frac{3}{8} - 1 \frac{1}{4}$ "	578014

REMS Mini-Press S 22V ACC	Weight	Power (110V)	Force	Working Range	Art.-No.
Basic-Pack In sturdy steel case	5.7 lbs	380 W / 3.5 Amps	22 kN	$\varnothing \frac{3}{8} - 1 \frac{1}{4}$ "	578015
Basic-Pack In L-Boxx system case	5.7 lbs	380 W / 3.5 Amps	22 kN	$\varnothing \frac{3}{8} - 1 \frac{1}{4}$ "	578016

REMS PRESSING TONGS AND RINGS



5.5 million! REMS produced more than 5.5 million pressing tongs by the end of 2022. This success confirms the leading role of REMS in press-jointing technology. In Europe, REMS delivers pressing tongs for over 300 pressfitting systems.

REMS pressing tongs

For all common pressfitting systems

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table. Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result. Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22 V ACC with 45 kN thrust force. Adapter tongs required for driving REMS (PR) pressing rings. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)



REMS pressing rings (PR-2B)



REMS pressing rings S (PR-2B), continuously swivellable

REMS pressing tongs Mini / REMS pressing rings S (PR-2B)

Universal for all common pressfitting systems

German Quality Product

System	Pressing contour	Art.-No.
ASTM F 1807	US 3/8"	578534
(Fittings with	US 1/2"	578536
Copper Crimp	US 3/4"	578538
Ring for PEX tubing)	US 1"	578540
Cello Products	VUS 1/2"	578566
Press	VUS 3/4"	578568
	VUS 1"	578570
	VUS 1 1/4"	578606
CerroPress®	on request	
Conex Bänninger	BMP 1/4"	578700
>B< MaxiPro	BMP 3/8"	578702
	BMP 1/2"	578704
	BMP 5/8"	578706
	BMP 3/4"	578708
	BMP 7/8"	578710
	BMP 1"	578712
	BMP 1 1/8"	578714
Conex Bänninger >B< Press	on request	
Elkhart	VUS 1/2"	578566
APOLLOXPRESS	VUS 3/4"	578568
Fittings Copper	VUS 1"	578570
and Low-Lead Brass	VUS 1 1/4"	578606
Evans Components	VAU 15 (1/2")	578630
Presslok	VAU 20 (3/4")	578632
	VAU 25 (1")	578634
Gallagher USA	H 12 (1/4")	578396
YogaPipe ACR	U 14 (3/8")	578372
	U 16 (1/2")	578374
	U 18 (5/8")	578376
	U 20 (3/4")	578378
	U 25 (7/8")	578380
	U 32 (1 1/8")	578382
Geberit Mapress	M 12	578310
STAINLESS STEEL	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
Grinnell G-PRESS	VUS 1/2"	578566
Copper Fittings	VUS 3/4"	578568
	VUS 1"	578570
	VUS 1 1/4"	578606
JUNGWOOD	VUS 1/2"	578566
JWPress	VUS 3/4"	578568
	VUS 1"	578570
	VUS 1 1/4"	578606
LEGEND-PRESS	VUS 1/2"	578566
press fitting system	VUS 3/4"	578568
	VUS 1"	578570
	VUS 1 1/4"	578606
Mueller Industries	VUS 1/2"	578566
Streamline PRS	VUS 3/4"	578568
	VUS 1"	578570
	VUS 1 1/4"	578606
NIBCO (USA)	VUS 1/2"	578566
Press System	VUS 3/4"	578568
Copper	VUS 1"	578570
	VUS 1 1/4"	578606
Uponor MLC	UP 14	578576
	UP 16 (1/2")	578578
	UP 18	578580
	UP 20 (5/8")	578582
	UP 25 (3/4")	578584
	UP 32 (1")	578586
	U 40	578386
Viega ProPress	VUS 1/2"	578566
System USA	VUS 3/4"	578568
	VUS 1"	578570
	VUS 1 1/4"	578606
Viega MegaPress	VMP 1/2"G	578666
(not for MegaPressG)	VMPz 3/4"	578664

System	Pressing contour	Art.-No.
WATTS RADIANT	US 3/8"	578534
Watts WaterPEX	US 1/2"	578536
	US 3/4"	578538
	US 1"	578540
WATTS RADIANT	US 3/8"	578534
Watts RadiantPEX	US 1/2"	578536
	US 3/4"	578538
	US 1"	578540
WATTS RADIANT	U 16 (1/2")	578374
Watts RadiantPEX-AL	U 20 (3/8")	578378
	U 25 (3/4")	578380
	U 32 (1")	578382
ZURN INDUSTRIES	US 3/8"	578534
ZURN PEX	US 1/2"	578536
	US 3/4"	578538
	US 1"	578540

REMS pressing tongs Mini for other U.S. pressfitting systems on request.



REMS adapter tongs Mini Z8
for driving REMS pressing rings S (PR-2B).
Suitable for all REMS radial presses 22 kN.
Art.-No. 574700 R



Scan for full listing

REMS multi-angled pressing rings S (PR-2B)



System	Pressing contour	Art.-No.
Copper Press Fitting Systems	VUS 1/2"	574764
for water e.g. Viega ProPress	VUS 3/4"	574766
	VUS 1"	574768
	VUS 1 1/4"	574770
Conex Bänninger	BMP 1/4" S (PR-2B)	574810
>B< MaxiPro	BMP 3/8" S (PR-2B)	574812
	BMP 1/2" S (PR-2B)	574814
	BMP 5/8" S (PR-2B)	574816
	BMP 3/4" S (PR-2B)	574818
	BMP 7/8" S (PR-2B)	574820
	BMP 1" S (PR-2B)	574822
	BMP 1 1/8" S (PR-2B)	574824

RADIAL PRESS JOINTING



REMS Mini-Press A4 22 V ACC - Cordless radial press with automatic circuit control. For producing pipe pressing joints \varnothing $\frac{3}{8}$ – 1 $\frac{1}{4}$ ". For operating with REMS pressing tongs A4. Also for other suitable makes of compact pressing tongs / rings with 24 kN thrust force.

REMS Mini-Press A4 22 V ACC

Universal up to \varnothing 1 $\frac{1}{4}$ ". Super light, super small, super handy, ultra fast. Pressing under 4 s. Automatic circuit control.


- Universal, handy cordless tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems
- Super light and handy. Drive unit with battery Li-Ion only 5.6 lbs
- Optimum weight distribution for single-hand operation
- Ergonomically designed housing
- Secure seating of pressing tongs by automatic locking
- Swivelling pressing tongs seat for REMS pressing tongs A4
- Enormous thrust and pressing force for fast and perfect press jointing

COMPACT MINI TOOL

! NEW FEATURE !
Pressing tongs
are interchangeable
with other compact
press tools

REMS pressing tongs A4

System	Pressing contour	Art.-No.
Viega ProPress	VUS ½"	400328
System USA	VUS ¾"	400330
	VUS 1"	400332
	VUS 1¼"	400334
Viega MegaPress	coming soon	
Conex Bänninger >B< MaxiPro	BMP ¼"	400310
	BMP ⅜"	400312
	BMP ½"	400314
	BMP ⅝"	400316
	BMP ¾"	400318
	BMP ⅞"	400320
	BMP 1"	400322
	BMP 1½"	400324
ASTM F 1807	US ⅜"	400344
(Fittings with Copper Crimp	US ½"	400346
Ring for PEX tubing)	US ¾"	400348
	US 1"	400350



REMS
multi-angled
pressing rings S
available

360° rotatable with automatic locking. Electro-hydraulic drive with powerful battery motor 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch. Integrated LED work light.



Automatic Circuit Control

German Quality Product



REMS Mini-Press A4 22V ACC	Weight Drive Unit	Power (110V)	Force	Working Range	Art.-No.
Basic-Pack In sturdy steel case	5.6 lbs	380 W / 3.5 Amps	24 kN	Ø ¼ – 1 ¼"	400012
Basic-Pack In L-Boxx system case	5.6 lbs	380 W / 3.5 Amps	24 kN	Ø ¼ – 1 ¼"	400013

RADIAL PRESS JOINTING - STANDARD SIZE TOOLS



REMS Standard Size Press Tools – universal up to Ø 4". Secure crimping in seconds. Automatic locking of pressing tongs. Only one type of pressing tongs / pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

REMS Akku-Press 22 V ACC

- Electro-hydraulic drive unit
- Compact and light
- Optimum weight distribution for single-hand operation
- Swivelling pressing tongs seat (360°)
- Automatic-Circuit-Control (ACC): Automatic retraction after completion of pressing operation (Automatic Circuit Control)
- Pressure monitoring



Automatic Circuit Control
German Quality Product



Steel case



L-Boxx



REMS Akku-Press 22 V ACC	Weight drive unit	Power (110 V)	Force	Working Range	Art.-No.
Basic-Pack In sturdy steel case	7.3 lbs	380 W / 3.5 Amps	32 kN	Ø 3/4" – 4"	576010
Basic-Pack In L-Boxx system case	7.3 lbs	380 W / 3.5 Amps	32 kN	Ø 3/4" – 4"	576011

REMS Akku-Press XL 45 kN 22 V ACC

- Electro-hydraulic drive unit
- Small in size, standing design
- Optimum weight distribution
- Swivelling pressing tongs seat (360°)
- Automatic-Circuit-Control (ACC): Automatic retraction after completion of pressing operation (Automatic Circuit Control)
- Long working stroke for large diameter pressing
- Pressings in a single action
- Ergonomically designed housing and soft grip
- LED work light for illuminating the work place and machine status check



Automatic Circuit Control
German Quality Product



XL-Boxx



REMS Akku-Press XL 45 kN 22 V ACC	Weight drive unit	Power (110 V)	Force	Working Range	Art.-No.
Basic-Pack In XL-Boxx system case	14.3 lbs	380 W / 3.5 Amps	45 kN	Ø 2 1/2" – 4"	579011

CONNECTED



Universal up to Ø 4". With Connected functionality via Wi-Fi radio standard and OLED display. Selectable ACC drive mode. Pressure monitoring. Anti-vibration system. Automatic locking of pressing tongs. Electrically monitored closing position of the tong retaining bolt.

REMS Akku-Press 22 V ACC Connected




Pressure monitoring

The pressing pressure is constantly monitored during the pressing process. The pressure-time diagram of the compression can be shown directly on the OLED display.



Evaluation of the pressing

If the baling pressure was within the specification, a "laughing smiley face" is shown on the OLED display.

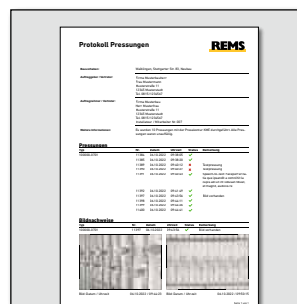

Logs with your own company logo

All measurement/press data are logged. The user can access this data via the REMS Service Portal, upload images of pressings and create logs with text and images.



Geolocation

Automatic determination of the press locations and visualization on the map.

STANDARD SIZE TOOLS



Secure crimping in seconds. Voice recordings with voice recognition. Creating reports with texts and pictures. Geolocalisation of the pressing sites. Li-Ion 21.6 V, 2.5 Ah battery for approx. 210 pressings Viega Propress 1/2" with one battery charge*.



Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display, for making press joints \emptyset 3/4"–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electrically monitored closing position of the tong retaining bolt. Electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Anti-vibration system. Safety tip switch. LED work lights. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 100–240 V, 50–60 Hz, 90 W.



Voice recording with voice recognition

A voice recording can be made for each pressing. Via "Speech-to-Text" (speech recognition) a voice recording can be converted into editable text.

REMS Akku-Press 22 V ACC Connected	Weight drive unit	Power (110 V)	Force	Working Range	Art.-No.
Basic-Pack In sturdy steel case	6.6 lbs	400 W Brushless	32 kN	\emptyset 3/4"–4"	576014
Basic-Pack In L-Boxx system case	6.6 lbs	400 W Brushless	32 kN	\emptyset 3/4"–4"	576015

* ambient temperature approx. 68°F.

REMS PRESSING TONGS / RINGS

Only one type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

German Quality Product

System	Pressing contour	Driven by adapter tongs	Art.-No.
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8" *		571450
	US 1/2" *		571455
	US 3/4" *		571460
	US 1" *		571465
	US 1 1/4"		571470
	US 1 1/2"		571475
	US 2"		571477
Cello Products Press	VUS 1/2"		571770
	VUS 3/4"		571775
	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
CerroPress®	on request		
Conex Bänninger >B< MaxiPro	BMP 1/4"		571700
	BMP 3/8"		571702
	BMP 1/2"		571704
	BMP 5/8"		571706
	BMP 3/4"		571708
	BMP 7/8"		571710
	BMP 1"		571712
	BMP 1 1/8"		571714
Conex Bänninger >B< Press	on request		
Elkhart	VUS 1/2"		571770
	VUS 3/4"		571775
APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
Elkhart APOLLOXPRESS	VUSFz 2 1/2" (PR-3B) ¹⁾	Z5	572819
	VUSFz 3" (PR-3B) ¹⁾	Z5	572820
LD-C Fittings Copper	VUSFz 4" (PR-3B) ¹⁾	Z5	572821
Evans Components Presslok	VAU 15 (1/2")		572687
	VAU 20 (3/4")		572689
	VAU 25 (1")		572691
	ECI 1 1/2"		571932
	ECI 2" (4G)		571934
	ECI 2 1/2" XL (PR-3S) ¹⁾²⁾	Z6 XL ³⁾ /Z7 XL 45 kN ⁴⁾	579104
	ECI 3" XL (PR-3S) ¹⁾²⁾	Z6 XL ³⁾ /Z7 XL 45 kN ⁴⁾	579105
	ECI 4" XL (PR-3S) ¹⁾²⁾	Z6 XL ³⁾ /Z7 XL 45 kN ⁴⁾	579106
Geberit Mappress STAINLESS STEEL	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (4G)		570160
	M 54 (4G)		570170
	M 42 (PR-3S) ¹⁾	Z2	572706
	M 54 (PR-3S) ¹⁾	Z2	572708
	M 76,1 XL (PR-3S) ¹⁾²⁾	Z6 XL ³⁾ /Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ¹⁾²⁾	Z6 XL ³⁾ /Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ¹⁾²⁾	Z6 XL ³⁾ /Z7 XL 45 kN ⁴⁾	579111
Gallagher USA	H 12 (1/2")		570300
	U 14 (3/8")		570760
YogaPipe ACR	U 16 (1/2")		570765
	U 18 (5/8")		570770
	U 20 (3/4")		570775
	U 25 (7/8")		570780
	U 32 (1 1/8")		570785
Grinnell G-PRESS Copper Fittings	VUS 1/2"		571770
	VUS 3/4"		571775
	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
	VUSFz 2 1/2" (PR-3B) ¹⁾	Z5	572819
	VUSFz 3" (PR-3B) ¹⁾	Z5	572820
	VUSFz 4" (PR-3B) ¹⁾	Z5	572821
JUNGWOO JWPress	VUS 1/2"		571770
	VUS 3/4"		571775
	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
	VUSFz 2 1/2" (PR-3B) ¹⁾	Z5	572819
	VUSFz 3" (PR-3B) ¹⁾	Z5	572820
	VUSFz 4" (PR-3B) ¹⁾	Z5	572821
LEGEND-PRESS press fitting system	VUS 1/2"		571770
	VUS 3/4"		571775
	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790

System	Pressing contour	Driven by adapter tongs	Art.-No.
	VUS 2"		571795
	VUSFz 2 1/2" (PR-3B) ¹⁾	Z5	572819
	VUSFz 3" (PR-3B) ¹⁾	Z5	572820
	VUSFz 4" (PR-3B) ¹⁾	Z5	572821
Mueller Industries Streamline PRS	VUS 1/2"		571770
	VUS 3/4"		571775
	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
	VUSFz 2 1/2" (PR-3B) ¹⁾	Z5	572819
	VUSFz 3" (PR-3B) ¹⁾	Z5	572820
	VUSFz 4" (PR-3B) ¹⁾	Z5	572821
NIBCO (USA) Press System	VUS 1/2"		571770
	VUS 3/4"		571775
Copper	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
Uponor MLC	UP 14		572630
	UP 16 (1/2")		572632
	UP 18		572634
	UP 20 (5/8")		572636
	UP 25 (3/4")		572638
	UP 32 (1")		572640
	U 40		570790
	U 50		570795
	U 63 (PR-3B) ¹⁾	Z4	572837
	U 63 (S)		572365
	U 75 (PR-3B) ¹⁾	Z4	572828
Viega ProPress System USA	VUS 1/2"		571770
	VUS 3/4"		571775
	VUS 1"		571780
	VUS 1 1/4"		571785
	VUS 1 1/2"		571790
	VUS 2"		571795
XL-C/XL-S	VUSFz 2 1/2" (PR-3B) ¹⁾	Z5	572819
XL-C/XL-S	VUSFz 3" (PR-3B) ¹⁾	Z5	572820
XL-C/XL-S	VUSFz 4" (PR-3B) ¹⁾	Z5	572821
Viega MegaPress (not for MegaPressG)	VMP 1/2"		571762
	VMPz 3/4"		571764
	VMPz 1"		571767
	VMPz 1 1/4" (PZ-S)		572413
	VMPz 1 1/2" (PR-3B) ¹⁾	Z5	572844
	VMPz 2" (PR-3B) ¹⁾	Z5	572845
WATTS RADIANT Watts WaterPEX	US 3/8" *		571450
	US 1/2" *		571455
	US 3/4" *		571460
	US 1" *		571465
	US 1 1/4"		571470
	US 1 1/2"		571475
WATTS RADIANT Watts RadiantPEX	US 3/8" *		571450
	US 1/2" *		571455
	US 3/4" *		571460
	US 1" *		571465
	US 1 1/4"		571470
	US 1 1/2"		571475
WATTS RADIANT Watts RadiantPEX-AL	U 16 * (1/2")		570765
	U 20 * (5/8")		570775
	U 25 * (3/4")		570780
	U 32 (1")		570785
ZURN INDUSTRIES ZURN PEX	US 3/8" *		571450
	US 1/2" *		571455
	US 3/4" *		571460
	US 1" *		571465
	US 1 1/4"		571470
	US 1 1/2"		571475
	US 2"		571477

REMS pressing tongs for other U.S. pressfitting systems on request.

* These pressing tongs also fit the manual radial press REMS Eco-Press.

¹⁾ An adapter tong is required for driving these pressing rings.

²⁾ Driven by REMS Power-Press XL.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC.



Scan for full listing

ACCESSORIES



574702



572795



572801



572802



579120



579123



570295



570290



572810



572809



574516



574704



571136



571137



572813




579603

Description	Art.-No.
Adapter tong Z8 for driving REMS pressing rings S (PR-2B)	574702
Adapter tong Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795
Adapter tong Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801
Adapter tong Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802
Adapter tong Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120
Adapter tong Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22 V ACC	579123

Description	Art.-No.
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40, H 40 A, VUS 1½", VUS 2")	570290
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/VUSFz 2½–4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-5) and 2 pressing rings VMPz 1½–2" (PR-3B)	572809
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813

Manual Press Tool

REMS Eco-Press

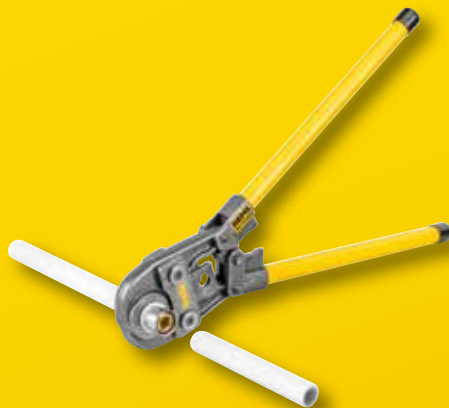

Info

Available on request.

Corded Press Tools

REMS Power-Press SE



REMS Power-Press ACC






REMS cropping tongs

For cutting threaded rods!

- High performance cropping tongs in forged and specially hardened steel for cutting threaded rods
- Reversible cropping inserts for double service life
- Cropping inserts with precise thread contour machined on CNC production centres ensure guidance of threaded rod during cropping. Thus cropping to length, free from burrs. After cropping the threaded rod can be screwed into a threaded connection of the pipe clip or the nut without any rework

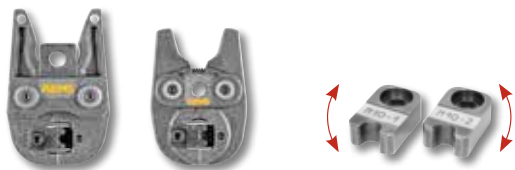

REMS cropping tongs	Art.-No.
UNC 3/8"	571845
UNC 1/2"	571850
REMS cropping tongs Mini	Art.-No.
UNC 3/8"	578623
REMS cropping tongs Mini A4	Art.-No.
available early 2024	
Accessories	Art.-No.
Cropping insert UNC 3/8" (pair)	571846
Cropping insert UNC 1/2" (pair)	571851

REMS cable shear

Easy cutting of electric cable!

- High-grade cable shear in forged and specially hardened steel for cutting electric cable
- Replaceable cutting blades
- Large cutting range
- Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force



[German Quality Product](#)

Description	Art.-No.
REMS cable shear	571887
Cable cutters (pack of 2)	571889

REMS Ex-Press Cu 22 V ACC

- Fast, easy electric expanding up to $\varnothing 1 \frac{1}{2}$ "
- For soft copper and soft aluminium tubes
- With automatic return
- Conical expanding mandrel for even centric expanding
- Li-Ion 21.6 V, 2.5 Ah battery for approx. 600 expansions of soft copper $\frac{3}{8}$ " with one battery charge




German Quality Product

Description	Weight drive unit	Power (110V)	Force	Working Range	Art.-No.
REMS Ex-Press Cu 22 V ACC Basic-Pack	6 lbs	380 W	20 kN	$\varnothing \frac{3}{8} - 1\frac{1}{2}$ "	575020

Expander heads Cu

- fit expander drives of REMS Ex-Press 22V Cu ACC and other makes also
- 6-face mandrel for even and concentric expanding
- Extra long segments result in extra long sockets for perfect tube connections
- Expander heads with calibration neck

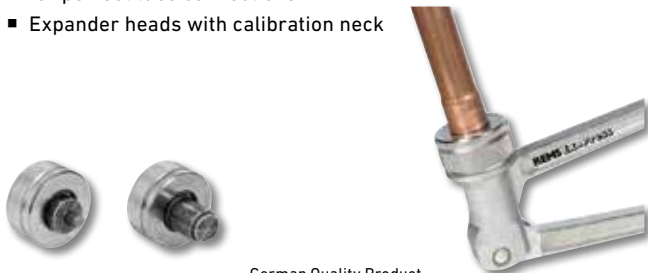

German Quality Product

REMS Expander heads Cu	Art.-No.
Set $\frac{3}{8} + \frac{1}{2} + \frac{3}{4} + \frac{3}{4} + \frac{1}{2} + 1\frac{1}{2}$ "	150017
$\frac{3}{8}$ "	150220
$\frac{1}{2}$ "	150225
$\frac{3}{4}$ "	150230
$\frac{3}{4}$ "	150235
$\frac{7}{8}$ "	150240
1"	150245
1 $\frac{1}{8}$ "	150250
1 $\frac{1}{2}$ " 35 mm	150190
1 $\frac{1}{2}$ " 42 mm	150210

REMS Hurrigan H

- Economic manual tool for efficiently making T-branches for pipe installations without fittings
- **The extractor tool can be used with an electric drill as a drive unit**
- Can be used on already installed pipes
- Hard and soft copper $\frac{3}{8} - \frac{7}{8}$ "



German Quality Product

REMS Hurrigan H	Art.-No.
Set $\frac{3}{8} + \frac{1}{2} + \frac{3}{4} + \frac{3}{4} + \frac{1}{2}$ "	151005



Grip wrench
for clamping the tool holder
Art.-No. 076117



Ratchet lever $\frac{1}{2}$ "
Art.-No. 074021



REMS Powersaw

The saw for the pipe fitter!

- Power-transferring guide support, 400% additional sawing force
- allows effortless, fast, right angled sawing anywhere on site
- maintenance-free oscillating gear enables a simultaneous generation of saw and orbital stroke of lift rod and saw blade (ANC)



REMS Powersaw



REMS Powersaw SR
With electronic
Speed-Regulation



REMS Powersaw 22V VE



REMS Powersaw
pneumatic

Description		Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Powersaw Set In sturdy steel case	with guide support 2"	6.6 lbs	1050 W / 9.5 Amps	single speed / 2400 rpm	Ø ½–6"	560020
REMS Powersaw SR Set In sturdy steel case	with guide support 2"	6.8 lbs	1400 W / 13 Amps	six speed / 700–2200 rpm	Ø ½–6"	560026
REMS Powersaw 22V VE Set Li-Ion 21.6V, 9.0Ah battery, 100–240V, 50–60 Hz, 90W rapid charger. In sturdy steel case	with guide support 2"	7.5 lbs	500 W / 4.3 Amps	variable speed / 0–1900 rpm	Ø ½–2"	560053
REMS Powersaw pneumatic In sturdy steel case	with guide support 2"	8.4 lbs	Pneumatic	variable speed / 0–1700 rpm	Ø ½–6"	560022

REMS saw blades

Alternating tooth pitch (combi-teeth) for fast, smooth cut, also when sawing mixed materials (wood/metal).

Double tang



Special saw blades for right angle sawing.

REMS special saw blades → REMS Tiger, etc.	Ø inches/Length mm	Tooth pitch mm	Material*	Teeth	Colour	PU	Art.-No.
REMS special saw blade 2"/140-2.5 steel pipes ≤ 2"	2"/140	2.5	HSS-Bi		yellow	5	561007
REMS special saw blade 2"/140-3.2 steel pipes ≤ 2"	2"/140	3.2	HSS-Bi		yellow	5	561001
REMS special saw blade 4"/200-3.2 steel pipes ≤ 4"	4"/200	3.2	HSS-Bi		yellow	5	561002
REMS special saw blade 6"/260-3.2 steel pipes ≤ 6"	6"/260	3.2	HSS-Bi		yellow	5	561008

For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, use the finer toothed REMS universal saw blade instead of the REMS special saw blade in combination with REMS Powersaw SR with electronic speed regulation.

Saw blades for free-hand sawing for different materials. Flexible saw blades, also for sawing flush with wall.



Double tang




REMS universal saw blades → REMS Tiger, REMS Cat, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour	PU	Art.-No.
REMS universal saw blade 100-1.8/2.5 for all sawing work	100	Combo 1.8/2.5	HSS-Bi flexible		red	5	561006
REMS universal saw blade 150-1.8/2.5 for all sawing work	150	Combo 1.8/2.5	HSS-Bi flexible		red	5	561005
REMS universal saw blade 200-1.8/2.5 for all sawing work	200	Combo 1.8/2.5	HSS-Bi flexible		red	5	561003
REMS universal saw blade 300-1.8/2.5 for all sawing work	300	Combo 1.8/2.5	HSS-Bi flexible		red	5	561004


Also for nail-embedded wood, pallets. For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, lower speed required, e.g. by using REMS Powersaw SR with electronic speed regulation.

Unique features of REMS reciprocating saws:

- Universal saw blade clamp for holding all saw blades – with universal or double tang – without changing or turning the saw blade thrust piece
- Sturdy, square lift rod, mounted precisely in needle bearings, prevents deflection of bearing and guarantees a long service life
- Guide support and special saw blade for right angle cuts and super fast sawing up to 6".

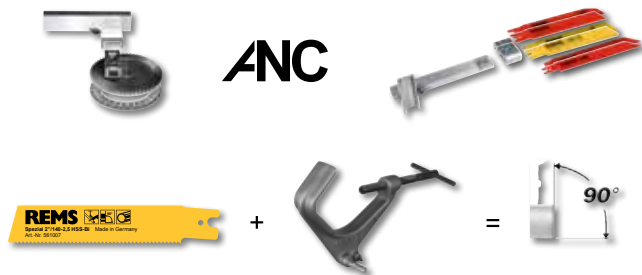

REMS guide support

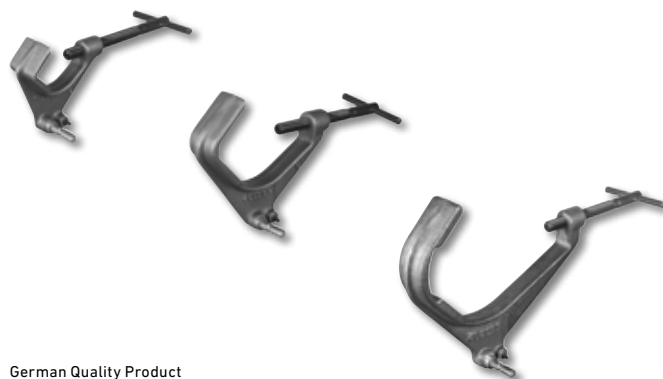

German Quality Product

Description	Art.-No.
Guide support 2", for pipes Ø ½ – 2"	563000
Guide support 4", for pipes Ø 2½ – 4"	563100
Guide support 6", for pipes Ø 5 – 6"	563200

REMS Turbo Cu-INOX

Burr-reduced, right angle, rapid!

- Portable circular pipe sawing machine
- Burr-reduced sawing through double clamping vice
- Saws without lubricant. Ideal for stainless steel tubes and copper tubes of pressfitting systems
- Proven universal motor
- Maintenance-free gear
- Powerful, e.g. $\varnothing \frac{3}{4}$ " in only 4 s
- 60 rpm: Ideal speed prevents overheating the material
- Compact, easy to transport
- Connection for deburrer



Dry cutting!

German Quality Product

Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Turbo Cu-INOX Basic (without saw blade)	37 lbs	500 W / 4.3 Amps	60 rpm	$\varnothing \leq 3"$	849006

Accessories	Art.-No.
Circular saw blade HSS, fine-toothing, 225x2x32, 220 teeth	849703
Circular saw blade HSS-E (cobalt alloyed), fine-toothing, 225x2x32, 220 teeth.	849706
REMS REG 10-54 E outer/inner pipe deburrer for pipes $\varnothing 10-54$ mm, $\varnothing \frac{1}{2}-2\frac{1}{2}"$	113835
Stand	849315
Wheel stand	849310

REMS Turbo K

The most powerful in its class!

- Compact, easy to carry
- Universal vice with length stop
- Robust, maintenance-free gear
- Proven universal motor
- Ideal speed (115 rpm) for fast, smooth sawing
- Powerful, e.g. 2" steel pipe in only 5 s



Automatic oiling and cooling!

German Quality Product

Working Range

90°	78	55	70x50	50x50	40	40	50x30	
45°	60	55	60x40	50x50	40	40	50x30	

All dimensions are metric (mm)

Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Turbo K Basic (without saw blade)	48 lbs	1200 W / 10 Amps	115 rpm	see table above	849007

Accessories	Art.-No.
Universal circular saw blade HSS, 225x2x32, 120 teeth	849700
Circular saw blade HSS, fine-toothing, 225x2x32, 220 teeth	849703
Circular saw blade HSS-E (cobalt alloyed), fine-toothing, 225x2x32, 220 teeth.	849706
Speed regulator for cutting e.g. stainless steel at optimum speed	849503
Stand	849315
Wheel stand	849310

CUTTING



Ideal for pressfitting systems. Right angled cutting, according to requirements. Chip-free, no chips in piping system. No outer burr, no damage to O-ring by outer burr. Dry cutting, no damage to O-rings from lubricants. Fast, prevents degradation of pipe material through overheating.

REMS Nano

Cutting from 3/8" up to 1 5/8". Ultra-light. Fast.

- Electric or battery powered tube cutting machine for fast, right angled cutting without outer burr
- Easy cutting of the tubes by specially designed cutter wheel
- Handy, light and compact





REMS Nano



REMS Nano 11 V

German Quality Product

Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Nano Basic-Pack (without cutter wheel)	4.2 lbs	130 W / 1.7 Amps	130 rpm	Ø 3/8" - 1 1/8" copper Ø 3/8" - 1 1/8" Inox	844010
REMS Nano 11 V Basic-Pack (without cutter wheel)	4.6 lbs	270 W / 2.4 Amps	130 rpm	Ø 3/8" - 1 1/8" copper Ø 3/8" - 1 1/8" Inox	844011

Accessories		Art.-No.
REMS cutter wheel Cu-INOX	 for stainless steel pipes of pressfitting systems, copper, C-steel	844050
REMS cutter wheel V	 for multilayer composite pipes, copper	844051

CUTTING



REMS Cento – Cutting and deburring up to Ø 4" and 8" with REMS DueCento. Super fast. Right angled. Chip-free. No outer burr. Dry cutting. Universal for many pipe types. Ideal for pressfitting systems. Right angled cutting, according to requirements.

REMS Cento

Cutting up to 4". Fast, dry. No outer burr.

- REMS special cutter wheels for different materials
- Connection for deburring attachment (REMS REG 10–54 E)



Reamer-Attachment for
REMS REG 10–54 E





Wheel stand
(accessory)

Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Cento Basic (without cutter wheel)	37 lbs	1200 W / 10 Amps	115 rpm	Ø ½–4"	845001
REMS Cento 22V Basic (without cutter wheel)	38.8 lbs	500 W / 4.3 Amps	84 rpm	Ø ½–4"	845002

REMS DueCento

Cutting up to Ø 225 mm, 8".

- Right angled. Chip-free. Ready for welding. Fast.
- Without outside burr. Dry.



Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS DueCento Basic incl. Pipe support 1 (without cutter wheel)	81.5 lbs	1200 W/ 10 Amps	115 rpm	Ø 1¼–8"	845004

ACCESSORIES

REMS Cento / REMS Cento 22 V

Description	Art.-No.
Feed lever with spring plug for operating the drive unit on the floor (for drive units manufactured from 2014 onwards).	845218
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	845050
REMS cutter wheel Cu specially for pipes of copper pressfitting systems	845053
REMS cutter wheel St for steel pipes, cast iron pipes (SML)	845052
REMS cutter wheel V for plastic and multilayer composite pipes, wall thickness s ≤ 10 mm	845051
REMS cutting wheel C-SF especially for pipes of the pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.	845055
REMS cutting wheel RF for cutting welded drain pipes/down pipes made of stainless steel (EN 1124) with REMS Cento RF.	845054
Pipe support 2, height adjustable, for pipes Ø 40–110 mm, Ø 1½–4", with operation of the drive unit with feed lever on the floor	845230
Hardened, precision tubular steel rollers (pack of 4)	845118
Stainless tubular steel INOX rollers (pack of 4)	845110
Polyamide roller (pack of 4)	845131
REMS REG 10–54 E outer/inner pipe deburrer	113835
REMS REG 28–108 inner pipe deburrer for pipes Ø 28–108 mm, Ø ¾–4", for electric rotary drive by the cutting wheel of the REMS Cento, REMS Cento 22V pipe cutting machine (with REMS cutting wheel Art. No. 845050 or 845053).	113840
Stand	849315
Wheel stand	849310

REMS DueCento

Description	Art.-No.
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	845050
REMS cutter wheel Cu specially for pipes of copper pressfitting systems	845053
REMS cutter wheel St for steel pipes, cast iron pipes (SML)	845052
REMS cutter wheel V for plastic and multilayer composite pipes, wall thickness s ≤ 10 mm	845051
REMS cutting wheel C-SF especially for pipes of the pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.	845055
REMS cutter wheel P, s 21 for plastic and multilayer composite tubes, wall thickness s ≤ 21 mm	845057
Pipe support 1, height adjustable, for pipes Ø 100–225mm, Ø 4–8", with operation of the drive unit with feed lever on the floor	845220
Pipe support 2 height adjustable, for pipes Ø 40–110 mm, Ø 1½–4" (roller insert required)	845230
Roller insert for cutting pipes Ø 40–110 mm, Ø 1½–4"	845060



CUTTING

REMS RAS St

Robust quality tool for cutting steel pipes. Meets high demands and long service life.



German Quality Product

Description	Pipes Ø inch/mm	Art.-No.
REMS RAS St ½–2"	½–2" / 10–60	113000
REMS RAS St 1¼–4"	1¼–4" / 30–115	113100

Accessories	s ≤ mm	Art.-No.
REMS cutter wheel St 1/8–4", s 8 for REMS RAS St ½–2" and St 1¼–4"	8	341614
REMS cutter wheel St 1–4", s 12 for REMS RAS St 1¼–4"	12.5	381622

REMS RAS P/SW 45/L

Robust quality tool with two cutting systems for cutting and slitting plastic corrugated protective pipes.



Description	Pipes Ø inch/mm	Art.-No.
REMS RAS P/SW 45/L	≤ 45 mm / ≤ 1¾"	113480

Accessory	Art.-No.
REMS P/SW 45/L (pack of 3)	113481

REMS RAS Cu

Robust quality tools for cutting tubes. Ideal for cutting copper pipes.

NEW



German Quality Product

Description	Pipes Ø inch/mm	Art.-No.
Cu 3–16	3–16 / ½–¾"	113250 R
Cu 3–25	3–25 / ½–1"	113255 R
Cu 3–28	3–28 / ½–1½"	113260 R

Accessory	s ≤ mm	Art.-No.
REMS cutter wheel Cu 3–120, s 3	3	113225


Description	Pipes Ø inch/mm	Art.-No.
Cu 3–35	3–35 / ½–1¾"	113340 R
Cu 3–42	3–42 / ½–1¾"	113320 R
Cu 8–42	8–42 / ¾–1¾"	113370 R
Cu 8–64	8–64 / ¾–2½"	113410 R

Accessory	Art.-No.
REMS cutter wheel Cu 3–120, s 3	113225

REMS RAS Cu-INOX

Robust quality tools for cutting tubes. Ideal for cutting copper pipes, thin-walled, stainless steel pipes, thin-walled steel, aluminium and brass pipes.

NEW



German Quality Product

Description	Pipes Ø inch/mm	Art.-No.
Cu-INOX 3–16	3–16 / ½–¾"	113200 R
Cu-INOX 3–25	3–25 / ½–1"	113230 R
Cu-INOX 3–28 Mini	3–28 / ½–1½"	113240 R
Cu-INOX 3–28	3–28 / ½–1½"	113300 R


Accessory	s ≤ mm	Art.-No.
REMS cutter wheel Cu-INOX 3–120, s 4	4	113210

Description	Pipes Ø inch/mm	Art.-No.
Cu-INOX 3–35	3–35 / ½–1¾"	113350 R
Cu-INOX 3–42	3–42 / ½–1¾"	113330 R
Cu-INOX 6–42	6–42 / ¾–1¾"	113380 R
Cu-INOX 6–64	6–64 / ¾–2½"	113400 R

Accessory	s ≤ mm	Art.-No.
REMS cutter wheel Cu-INOX 3–120, s 4	4	113210

REMS RAS W INOX

Highly resistant quality tool for cutting corrugated metal hoses (corrugated pipes) made of stainless steel, also jacketed.



German Quality Product

Description	Pipes	Art.-No.
REMS RAS W INOX 10-32/40 S	DN 10–32 (40) / 3/8–1 1/2" (2")	113450

Accessory	Art.-No.
REMS cutter wheel W INOX 10-32/40 S on needle bearings	113461

REMS RAS P

the compact version with telescopic spindle. Telescopic spindle. Easy, quick adjustment in both directions.



NEW

Description	Pipes Ø inch/mm	Art.-No.
P 10–32 T	10–32 / 1/2–1 3/8"	290001
P 10–40 T	10–40 / 1/2–1 3/8"	290002

Accessory	s ≤ mm	Art.-No.
REMS cutter wheel P 10–40, s 4.5 for REMS RAS P 10–32 T, 10–40 T	4.5	290023

REMS RAS Cu-INOX S

Robust quality tools for cutting tubes. Ideal for cutting copper pipes, thin-walled, stainless steel pipes, thin-walled steel, aluminium and brass pipes.



German Quality Product

Description	Pipes Ø inch/mm	Art.-No.
Cu-INOX 3–28 S Mini	3–28 / 1/4–1 1/8"	113241
Cu-INOX 3–35 S	3–35 / 1/4–1 3/8"	113351
Cu-INOX 8–64 S	8–64 / 3/4–2 1/2"	113401

Accessory	s ≤ mm	Art.-No.
REMS cutter wheel Cu-INOX 3–120 S, s 4 on needle bearings	4	113213

REMS RAS P

High performance quality tools for cutting pipes. With quick adjustment. Ideal for cutting plastic and composite pipes.



German Quality Product


Description	Pipes Ø inch/mm	Art.-No.
P 10–40	10–40 / 1/2–1 3/8"	290050
P 10–63	10–63 / 1/2–2"	290000
P 50–110, s11	50–110 / 2–4"	290100
P 110–160	110–160 / 4–6"	290200

Accessories	s ≤ mm	Art.-No.
REMS cutter wheel P 10–63, s 7 for REMS RAS P 10–40, 10–63	7	290016
REMS cutter wheel P 50–315, s 11 for REMS RAS P 50–110, 110–160, 180–315	11	290116
REMS cutter wheel P 50–315, s 16 for REMS RAS P 50–110, 110–160, 180–315	16	290216
REMS cutter wheel P 50–315, s 19 for REMS RAS P 50–110, 110–160, 180–315	19	290316

CUTTING

REMS ROS P

Handy quality tools for clean, fast pipe cuts. For thin-walled pipes also. Sturdy aluminium/magnesium version. For single-hand operation. Ideal for cutting plastic and composite pipes.

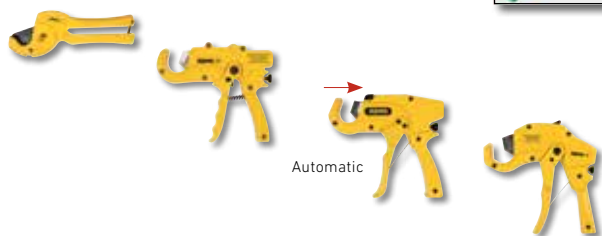

Description	Pipes ≤ Ø mm/inch	Art.-No.
P 26	26 / 1"	291240
P 35	35 / 1 3/8"	291200
P 35 A	35 / 1 3/8"	291220
P 42	42 / 1 1/2"	291250



Description	Pipes ≤ Ø mm/inch	Art.-No.
P 42 PS	42 / 1 1/2"	291000
P 42 S	42 / 1 1/2"	291010
P 63 P	63 / 2"	291270
P 63 S	63 / 2"	291290

Accessories	Art.-No.
Blade P 26 for REMS ROS P 26	291241
Blade P 35 for REMS ROS P 35	291201
Blade P 35 A for REMS ROS P 35 A	291221
Blade P 42 for REMS ROS P 42	291251
Blade P 42 PS for REMS ROS P 42 PS	291023
Blade P 42 S for REMS ROS P 42 S	291036
Blade P 63 P for REMS ROS P 63 P	291271
Blade P 63 S for REMS ROS P 63 S	291037

REMS ROS PEX 28 S

Robust quality tool for clean, fast cutting of pipes in one cut. Stable magnesium version. For one-hand operation. Ideal for cutting PEX pipes.



Description	Pipes ≤ Ø mm/inch	Art.-No.
REMS ROS PEX 28 S	28 / 1 1/8"	291420
Accessory		Art.-No.
Blade PEX 28 S		291421

REMS ROS P26/SW35 S

Robust quality tool for clean, fast cutting of pipes in one cut.



Description	Pipes ≤ Ø mm/inch	Art.-No.
REMS ROS P 26/SW 35 S	P 26/1" / SW 35/1 3/8"	291242
Accessories		Art.-No.
Blade P26/SW 35 S		291243
Cutting tool, pack of 4		291244

REMS ROS P flex

Robust quality tool for clean, fast cutting of pipes in one cut. Ideal for cutting flexible plastic hoses and soft plastic pipes.



Description	Pipes ≤ Ø mm/inch	Art.-No.
P flex 14	14 / 9/16"	291400
P flex 22	22 / 7/8"	291410
P flex 28 S	28 / 1 1/8"	291430

Accessories	Art.-No.
Blade P flex 14	291401
Blade P flex 22	291411
Blade P flex 28 S	291431

DEBURRING / CHAMFERING

REMS REG

The multiple edges!

- Easy, effortless deburring through multiple blades which are specially hardened and ground
- Robust metal design for tough use



Description	Pipes Ø inch/mm	Art.-No.
REMS REG 8-35	Ø 8-35 mm, 3/8-1 3/8"	113825
REMS REG 10-54	Ø 10-54 mm, 1/2-2 1/4"	113830
REMS REG 10-54 E	Ø 10-54 mm, 1/2-2 1/4"	113835

REMS REG 10-42

By hand or electric!

- Specially for stainless steel tubes
- Solid quality tool for high demand and versatile use
- Adapter for electric drive (accessory)




Description	Pipes Ø inch/mm	Art.-No.
REMS REG 10-42	Ø 10-42 mm, 1/2-1 5/8"	113810
Adapter for use with electric screw driver (speed ≤ 300 rpm)		113815

REMS REG 3-35

The sharp edge!

- Outer-inner tubing deburrer
- 3 deburrer blades, specially hardened and ground

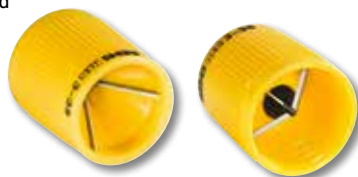


Description	Pipes Ø inch/mm	Art.-No.
REMS REG 3-35	Ø 3-35 mm, 1/8-1 3/8"	113900

REMS REG Universal

The all purpose deburrer!

- Robust metal design for tough use
- Rotating universal deburrer blade in handle accommodates to the work piece edge to be deburred
- Fast, simple blade replacement



Description	Art.-No.
REMS REG Universal	113910
Replacement blade	113360

REMS RAG

Chamfering at 15°

- Chamfering on commonly used plastic pipes
- Also suited for deburring plastic pipes
- Easily adjusted for pipe diameter and wall thickness



Description	Pipes Ø mm/inch	Art.-No.
REMS RAG P 16-110	Ø 16-110 mm, 3/4-4"	292110
REMS RAG P 32-250	Ø 32-250 mm, 1 1/4-10"	292210

FLUSHING / FILLING



REMS Solar-Push

Filling, flushing and venting in one action.

- Self priming
- High displacement
- Ideal for ground heat systems, underfloor heating and solar power systems
- Sturdy plastic tank to hold 7.92 gallons, made of UV-stabilised PE, with filling level indicator, removable, for easy cleaning, with large opening for easy filling
- Self-suction centrifugal pump, suitable for different transport media, e.g. heat transfer liquids, antifreeze, water, aqueous solutions, emulsions
- With proven, powerful condenser motor with quiet running



German Quality Product

Description	Weight	Power (110V)	Capacity	Pressure	Temperature	pH-Value	Art.-No.
REMS Solar-Push K 60	44 lbs	940 W / 8.5 Amps	7.92 gallons	80 psi	≤ 140 °F	6.5 – 9.5	115312

Accessories	Art.-No.
Fine filter with fine filter bag 70 µm	115220
Fine filter with fine filter cartridge 90 µm	115323
Flow direction changeover valve	115326

REMS Push / REMS Push INOX

Reliable pressure hold!

- Robust, job site-proven metal design
- Corrosion resistant, powder coated or stainless steel reservoir for 12 l content
- Wear resistant pressure piston in brass, Ø 30 mm
- Double valve system for reliable pressure built-up
- High pumping capacity with long stroke, fine pressure adjustment with short stroke
- Distortion resistant lever, doubles as carrying handle
- High pressure hose with fabric ply prevents measurement errors



Description	Pressure	Temperature	pH-Value	Art.-No.
REMS Push	870 psi	≤ 140 °F	7 – 12	115000
REMS Push INOX	870 psi	≤ 140 °F	7 – 12	115001
Fine scale pressure gauge p ≤ 16 bar, 230 psi				115045

FREEZING



REMS Frigo 2 F-Zero

Electrically freeze instead of emptying.

- Super fast up to 2"
- Closed refrigerant circuit. Environmentally safe
- High cooling capacity, e.g. 3/4" steel pipe in only 9 min*
- Particularly compact, patented deep-freezer heads, for very fast assembly
- Very small deep-freezer heads fitted parallel to the pipe leaving refrigerant hoses for working in confined areas and niches also
- All pipe sizes from 1/4"-1" can be frozen with only one deep-freezer head
- Flexible, extra-long refrigerant hoses in wear resistant, synthetic rubber for large work radius



German Quality Product

Description	Power (110V)	Working Range	Materials	Temperature range	Refrigerant	Art.-No.
REMS Frigo 2 F-Zero Set 1/4" - 1 1/4" with 2 coolant hoses, 8 ft long, 2 clamping straps 2 LCD digital thermometer and spray bottle	430 W / 4 Amps	Ø 1/4" - 2"	Steel, copper, plastic, composite pipes	≤ -22°F	R-290	131012

Accessories	Art.-No.
Upgrade kit 1 1/2" - 2" / 54-60 mm	131160

*ambient/water temperature approx. 18°C / 64°F.

REMS Eskimo

Freezing instead of draining!

- Super fast up to 2"
- Refrigerant carbon dioxide with high refrigerating capacity to -79°C (-110°F)
- Direct flow of the refrigerant onto the pipe ensure extremely short freezing times, e.g. $\frac{3}{4}$ " steel pipe in only 5 min
- No adjustment. The correct amount of refrigerant is automatically supplied
- Very small, highly flexible, indestructible freeze collars
- Rapid assembly
- For operating even in tight spots and niches
- Flexible, buckling-resistant and fractureproof high-pressure hoses
- Clamping screws cannot get lost
- Unbreakable brass injector
- For use with CO2 dip tube cylinder
- Without draining water lines, sprinkler or hot water systems



**GREAT
FOR REPAIRS
UNDER
PRESSURE**

German Quality Product

Description	Working Range	Materials	Temperature range	Refrigerant	Art.-No.
REMS Eskimo Set $\frac{1}{4}$ -2" with 10 pairs of freeze collars for the complete work range, bottle connector with T-distributor, closing nut, 2 handle pieces with injector, 2 high-pressure hoses	$\emptyset \frac{1}{4}$ -2"	Steel, copper, plastic, composite pipes	$\leq -110^{\circ}\text{F}$	Carbon dioxide (CO ₂)	130002


BENDING



REMS Swing

Bending tubes where they are installed!

- Fast operation through patented quick-acting feed forward and release
- Universal use for many tubes
- Handy and light, drive unit only 2.0 lbs
- Proven, reliable ratchet feed
- Easy, quick working, e.g. Ø ½" copper pipe bend in just 9 s
- Only 1 bender drive for the complete work range up to Ø 32 mm
- Marked bending formers for exact bending
- Cost recovered through savings on fittings and labor

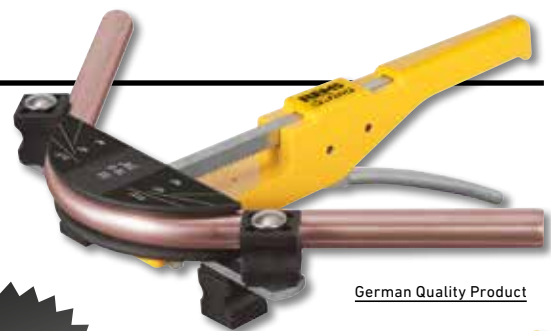

German Quality Product

**THE ORIGINAL,
DUPLICATED
BUT NOT
EQUALED**



Device for reverse bends

REMS Swing	Materials	Working Range	Art.-No.
Set ¾+½+¾+¾+¾"	soft copper	Ø ¾ - ¾"	153021
Set 14+16+18+20+25/26	soft copper, multilayer composite	Ø 10 - 32 mm	153022
Set 16+18+20+25/26+32	soft copper, multilayer composite	Ø 10 - 32 mm	153023
Set Allround 32 10+12+14+15+16+17+18+20+22+25/26+32, ¾+½+¾+¾+¾"	soft copper, multilayer composite	Ø 10 - 32 mm, Ø ¾ - ¾"	153028
Device for reverse bends			153140

REMS Hydro-Swing

Effortless working due to oil-hydraulic force transmission!

- Robust, compact drive unit with closed, maintenance-free hydraulic system
- Universal use for many tubes
- Handy and light, only 5.3 lbs
- Simple, fast operation, e.g. bends $\emptyset \frac{3}{8}$ " in only 18 s
- Only 1 bender drive for the complete work range up to $\emptyset 32$ mm ($1\frac{1}{4}$ ")
- Marked bending formers for exact bending
- Easy and rapid changing of bending formers
- Reliable hydraulic thrust with overload protection
- Bender recovered after a few bends through savings on fittings



German Quality Product



REMS device for reverse bends H-S

NEW

REMS Hydro-Swing	Materials	Working Range	Art.-No.
Set $\frac{3}{8} + \frac{1}{2} + \frac{3}{4} + \frac{3}{4} + \frac{7}{8}$ "	soft copper	$\emptyset \frac{3}{8} - \frac{7}{8}$ " / 32 mm	153521
Set 16+20+25/26+32	soft copper, multilayer composite	$\emptyset \frac{3}{8} - \frac{7}{8}$ " / 32 mm	153529
Set 10+12+14+15+16+17+18+20+22+25/26+32, $\frac{3}{8} + \frac{1}{2} + \frac{3}{4} + \frac{3}{4} + \frac{7}{8}$ "	soft copper, multilayer composite	$\emptyset \frac{3}{8} - \frac{7}{8}$ " / 32 mm	153528
REMS device for reverse bends H-S			153450

REMS Python

**Save on expensive fittings.
Easy bending up to $\emptyset 2"$, 75 mm!**

- Robust, oil hydraulic drive
- Upper back former support tiltable
- Angle scale 0 to 90°



Tripod (accessory)



German Quality Product

REMS Python	Materials	Working Range	Art.-No.
Set St $\frac{3}{8} + \frac{1}{2} + \frac{3}{4} + 1 + 1\frac{1}{4}$ "	steel pipes	$\emptyset \frac{3}{8} - 2"$	590020
Set St $\frac{1}{2} + \frac{3}{4} + 1 + 1\frac{1}{4} + 1\frac{1}{2} + 2"$	steel pipes	$\emptyset \frac{3}{8} - 2"$	590021
Set V 40+50+63 mm	multilayer composite	$\emptyset \frac{3}{8} - 2"$ / 32-75 mm	590022
Tripod			590150

BENDING



REMS Hydro-Swing 22 V

Effortless working due to electro-hydraulic force transmission.

- Robust, compact drive unit with closed, maintenance-free hydraulic system.
- Universal use for many tubes e.g. soft copper, stainless steel, multilayer piping
- Handy and light, only 5.3 lbs
- Simple, fast operation, e.g. bends $\varnothing \frac{3}{8}$ " in only 8 s
- Only 1 bender drive for the complete work range
- Marked bending formers for exact bending
- Easy and rapid changing of bending formers
- Reliable hydraulic thrust with overload protection
- Bender recovered after a few bends through savings on fittings
- For approx. 110 stainless steel pipe bends of the $\varnothing \frac{3}{8}$ " with one (2.5 Ah) battery charge



German Quality Product



REMS device for reverse bends H-S

NEW

REMS Hydro-Swing 22 V	Weight drive unit	Power (110V)	Force	Working Range	Art.-No.
Set $\frac{3}{8}$ + $\frac{1}{2}$ + $\frac{5}{8}$ + $\frac{3}{4}$ + $\frac{7}{8}$ "	5.3 lbs	380 W / 3.5 Amps	9 kN	$\varnothing \frac{3}{8}$ - $\frac{7}{8}$ "	153411
Set 16 + 20 + 25 / 26 + 32	5.3 lbs	380 W / 3.5 Amps	9 kN	$\varnothing \frac{3}{8}$ - $\frac{7}{8}$ " / 32 mm	153415
Set 10 - 32 / $\frac{3}{8}$ - $\frac{7}{8}$ " Set Allround 32	5.3 lbs	380 W / 3.5 Amps	9 kN	$\varnothing \frac{3}{8}$ - $\frac{7}{8}$ " / 32 mm	153418
REMS device for reverse bends H-S					153450

REMS Curvo / REMS Curvo 22 V

Cordless bending, wrinkle free up to 180°.

- Universal for many pipes and tubes
- Compact, with integral absorption of torque during bending
- Super light, drive unit only 18.7 lbs
- Can be used anywhere without previous setting
- Fast and creep speed operation for precise bending, e.g. 90° bends, Ø ¾" in only 6 s
- Angle scale 0 to 180°
- Rapid change of bending and back formers
- Only one type of bending and back formers for REMS Curvo, REMS Curvo 50 and REMS Curvo 22 V
- Maintenance-free gear with safety slipping clutch
- Bender recovered after a small number of bends through savings on fittings



German Quality Product

REMS 22V
LI-ION TECHNOLOGY
2,5 Ah 5,0 Ah 9,0 Ah

Description	Weight drive unit	Power (110 V)	Materials	Working Range*	Art.-No.
REMS Curvo Basic-Pack (without formers)	16 lbs	1000 W / 8.6 Amps	Hard copper Type L, soft copper, stainless steel, black iron steel pipe	Ø ¾ - 1½"	580010
REMS Curvo Set ¾ + ½ + ¾ + ¾ + ¾" O.D.	16 lbs	1000 W / 8.6 Amps	Hard copper Type L, soft copper, stainless steel, black iron steel pipe	Ø ¾ - 1½"	580024
REMS Curvo 22 V Basic-Pack (without formers)	17 lbs	500 W / 4.3 Amps	Hard copper Type L, soft copper, stainless steel, black iron steel pipe	Ø ¾ - 1½"	580014
REMS Curvo 22 V Set ¾ + ½ + ¾ + ¾ + ¾" O.D.	17 lbs	500 W / 4.3 Amps	Hard copper Type L, soft copper, stainless steel, black iron steel pipe	Ø ¾ - 1½"	580066



Accessories	Art.-No.
Machine support 3B height adjustable on tripod	586100
Machine support WB, height adjustable, for mounting on work bench	586150
REMS bending spray, 400 ml (14.1 oz)	140120

* the working range applies to hard copper and can vary for other materials

REMS Curvo 50

Wrinkle free bending of large pipes!

- Universal, compact electric tool for cold bending of pipes and tubes up to 50 mm, 1 1/8", up to 90°
- All bending formers and back formers from REMS Curvo can be used
- Simple, effortless, fast working, e.g. 90° bends of steel pipe Ø 1 1/4" in 37 s



German Quality Product



Description	Weight drive unit	Power (110 V)	Materials	Working Range	Art.-No.
REMS Curvo 50 Basic-Pack (without formers)	35 lbs	1000 W / 8.6 Amps	Hard copper Type L, soft copper, stainless steel, black iron steel pipe	Ø 3/8" - 1 1/8"	580110
Adaptor block 10-40, Support 10-40, 3/8"-1 1/8"					582120


SOLDERING



REMS Hot Dog 2

The smallest and most powerful soldering pliers!

- Only 1.5 lbs
- Super fast soldering without flame, e.g. $\varnothing \frac{5}{8}$ " in only 15 s
- Enormous heating capacity up to 800°C (1470°F)
- For permanent use
- No transformer required, directly connected to a socket
- Not usable for brazing, soft soldering only



German Quality Product

Description	Power (110V)	Working Range	Materials	Heating capacity	Art.-No.
REMS Hot Dog 2	440 W / 4 Amps	$\varnothing \frac{3}{8}$ – 1 $\frac{1}{2}$ "	Copper tubes	1472 °F	163020

REMS Contact 2000

The smallest, strongest and fastest unit of its kind!

- Rated power = Soldering capacity = 2000 W!
- Enormous heating capacity (900°C, 1650°F)
- Super fast soldering without flame, e.g. Ø ½" in only 18 s
- Ready to solder any time, to be connected only to a socket
- Indifferent to temperature influences electric control of soldering current, control voltage 24 V
- Prisma-electrodes ensure maximum use through favorable seat
- Wide work radius thanks to 4 m cable length
- Not usable for brazing, soft soldering only



German Quality Product



Description	Power (110V)	Working Range	Materials	Heating capacity	Art.-No.
REMS Contact 2000	2000 W / 18 Amps	Ø ½–2½"	Copper tubes	1652 °F	164011



for tight spaces



Accessories	Art.-No.
Prisma-electrodes (pair)	164111
Prisma-electrodes with holder (pair)	164110
Rod-electrodes (pair)	164115
Steel case	164250

PIPE AND DRAIN INSPECTION

REMS MiniScope

Mobile, handy endoscope camera for low-cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. For cordless operation.




NEW



Description	Resolution	Head size	Operating time	Art.-No.
REMS MiniScope Set	640 × 480 pixels	Ø 8 mm	6 hours	175401

REMS CamScope HD

Brilliant pictures and videos of cavities, shafts and pipes in HD quality (1920 × 1080 pixels).
MicroSD card slot.



NEW



Description	Resolution	Head size	Operating time	Art.-No.
REMS CamScope HD Set	1920 × 1080 pixels	Ø 8 mm	5 hours	175400

Accessory	Art.-No.
Camera cable set Color 8-5 HD, color camera Ø 8 mm, 1280 × 720 pixels, with 16 ft formable push cable	175400



PIPE AND DRAIN CLEANING

REMS Mini-Cobra S 22 V VE

Mobile, handy, cordless pipe cleaning device with fast switchover. For effortless and quick application to remove pipe blockages in kitchen, bath, toilet. Li-Ion 22V Technology. For battery and corded operation.



NEW



REMS 22V
LI-ION TECHNOLOGY
2,5 Ah 5,0 Ah 9,0 Ah

Description	Weight	Power (110V)	Speed	Working Range	Art.-No.
REMS Mini-Cobra S 22 V VE Set	10.5 lbs	500 W / 4.3 Amps	560 rpm	up to Ø 2"	170026

REMS Mini-Cobra

By hand or electric!

- Proven hand unit for quick application
- Indispensable to remove small blockages
- Robust, corrosion-resistant cable drum in shock-proof plastic
- Highly flexible cables for effortless feed-forward also in tight pipe bends
- Drive by hand or electric through a normal, slow rotating drill with stepless drive or standard screw driver



Description	Art.-No.
REMS Mini-Cobra with cable 8x7.5 m	170010
Drain cleaning cable 8x7.5 m	170200
Drain cleaning cable 10x10 m	170205

REMS Pull-Push

Fast removal of blockages!

- High downforce thanks to front adjustable grip handle
- 2 adaptor sleeves for optimum adaptation to the problem area: Short sleeve for sinks, basins and baths, long sleeve for toilets.



Description	Art.-No.
REMS Pull-Push	170300

DIAMOND CORE DRILLING



REMS Picus DP

Core drilling without water with micro-pulse technology

- Clean, simple, fast, e.g. 8" (200 mm) in steel-reinforced concrete \varnothing 2 1/2" (62 mm) only 5 minutes
- Ideal for core drilling in finished rooms, e.g. in residential, office and industrial buildings
- Micro-Pulse Technology: up to 21.120 pulses min⁻¹
- Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed



Scan for detailed information



REMS Picus DP Basic-Pack



REMS Picus DP Set Simplex 2



REMS Picus DP Set Titan

Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Picus DP Basic-Pack	15.5 lbs	2200 W / 20 Amps	880 rpm		180016
REMS Picus DP Set Simplex 2	15.5 lbs	2200 W / 20 Amps	880 rpm	steel-reinforced concrete $\leq \varnothing$ 6 3/8" (3"), masonry and other materials $\leq \varnothing$ 3"	180033
REMS Picus DP Set Titan	15.5 lbs	2200 W / 20 Amps	880 rpm		180035

REMS dry diamond core drilling crowns LS (LASER)

Especially for dry drilling with core drilling machines with micro-pulse technology. Universally usable for many materials, hand held or with drill stand. Uniform UNC 1¼ female connection thread. Drilling depth 12 ½". Specially developed, high quality diamond segments with high diamond content and special bonding for excellent drilling performance and very long life. Ideal for universal use in steel-reinforced concrete and masonry. Diamond segments with diamonds positioned in the bonding agent for fast, easy and quiet drilling. Laser-welded on fully automatic welding machines for consistent high quality of the weld. High temperature-resistant, even under extreme temperature load, no desoldering of the segments due to overheating.



Ø × drilling depth × connection	Art.-No.
TDKB LS 32 (1.26") x 320 (12.59") x UNC 1¼	181500
TDKB LS 42 (1.65") x 320 (12.59") x UNC 1¼	181502
TDKB LS 52 (2.05") x 320 (12.59") x UNC 1¼	181504
TDKB LS 62 (2.44") x 320 (12.59") x UNC 1¼	181506
TDKB LS 72 (2.83") x 320 (12.59") x UNC 1¼	181508
TDKB LS 82 (3.23") x 320 (12.59") x UNC 1¼	181510
TDKB LS 92 (3.62") x 320 (12.59") x UNC 1¼	181512
TDKB LS 102 (4") x 320 (12.59") x UNC 1¼	181514
TDKB LS 112 (4.41") x 320 (12.59") x UNC 1¼	181516
TDKB LS 122 (4.8") x 320 (12.59") x UNC 1¼	181532
TDKB LS 127 (5") x 320 (12.59") x UNC 1¼	181518
TDKB LS 132 (5.20") x 320 (12.59") x UNC 1¼	181520
TDKB LS 142 (5.59") x 320 (12.59") x UNC 1¼	181522
TDKB LS 152 (5.98") x 320 (12.59") x UNC 1¼	181524
TDKB LS 162 (6.38") x 320 (12.59") x UNC 1¼	181526
TDKB LS 182 (7.16") x 320 (12.59") x UNC 1¼	181528
TDKB LS 202 (7.95") x 320 (12.59") x UNC 1¼	181530

Universal diamond core drilling crowns

Quality German Quality Product. Universally usable for dry and wet drilling, hand held or with drill stand. Connecting thread UNC 1¼" female. Drilling depth 420 mm (16.5"). Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS universal diamond core drilling crowns in drive machines of other makes, as an accessory.



Ø × drilling depth × connection	Art.-No.
UDKB 32 (1.26") x 420 (16.53") x UNC 1¼	181010
UDKB 42 (1.65") x 420 (16.53") x UNC 1¼	181015
UDKB 52 (2.05") x 420 (16.53") x UNC 1¼	181020
UDKB 62 (2.44") x 420 (16.53") x UNC 1¼	181025
UDKB 72 (2.83") x 420 (16.53") x UNC 1¼	181030
UDKB 82 (3.23") x 420 (16.53") x UNC 1¼	181035
UDKB 92 (3.62") x 420 (16.53") x UNC 1¼	181040
UDKB 102 (4") x 420 (16.53") x UNC 1¼	181045
UDKB 112 (4.41") x 420 (16.53") x UNC 1¼	181050
UDKB 122 (4.8") x 420 (16.53") x UNC 1¼	181055
UDKB 125 (4.92") x 420 (16.53") x UNC 1¼	181057
UDKB 127 (5") x 420 (16.53") x UNC 1¼	181059
UDKB 132 (5.20") x 420 (16.53") x UNC 1¼	181060
UDKB 152 (5.98") x 420 (16.53") x UNC 1¼	181065
UDKB 162 (6.38") x 420 (16.53") x UNC 1¼	181070
UDKB 182 (7.16") x 420 (16.53") x UNC 1¼	181075
UDKB 200 (7.87") x 420 (16.53") x UNC 1¼	181080
UDKB 225 (8.86") x 420 (16.53") x UNC 1¼	181085
UDKB 250 (9.84") x 420 (16.53") x UNC 1¼	181090
UDKB 300 (11.81") x 420 (16.53") x UNC 1¼	181095

REMS Picus

REMS Picus S3
Basic-Pack



REMS Picus SR
Basic-Pack



for dry and wet drilling

REMS Simplex 2



REMS Titan



Scan for
detailed
information

Description	Weight drive unit	Power (110V)	Speed	Working Range	Art.-No.
REMS Picus S3 Basic-Pack	16.3 lbs	2200 W / 20 Amps	530 / 1280 / 1780 rpm	up to 6" (10")	180011
REMS Picus SR Basic-Pack	14.1 lbs	2200 W / 20 Amps	250 - 1200 rpm	up to 6" (10")	183010
REMS Simplex 2	Robust, handy drilling stand for core drilling up to Ø 7.95", incl. accessories for fastening				183700
REMS Titan	Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 11.81". For high demands. Tilttable up to 45°. Incl. accessories for fastening				183600
REMS Picus S2/3.5	on request			up to 11.81"	

REMS Helix 22 V VE

Drilling, screw driving and deburring.
With powerful, brushless battery motor.

- Drive machine with keyless quick chuck
- Clamping range 1.5–13 mm, right and left hand rotation
- 15 torque stages



NEW

REMS 22V
LI-ION TECHNOLOGY
2.5 Ah 5.0 Ah 9.0 Ah



Description	Weight drive unit	Power (110V)	Speed	Art.-No.
REMS Helix 22 V VE Set	3.5 lbs	500 W / 4.3 Amps	0–1900 rpm	190110

REMS tile drilling

For dry drilling



Description	Art.-No.
REMS tile drilling Set 6 + 8 + 10	181700
REMS tile drilling Ø 5 mm	181710
REMS tile drilling Ø 6 mm	181711
REMS tile drilling Ø 8 mm	181712
REMS tile drilling Ø 10 mm	181713
REMS tile drilling Ø 12 mm	181714
REMS tile drilling Ø 14 mm	181715

REMS Batteries



Description	Art.-No.
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240 V, 50–60 Hz, 90 W	571585
Rapid charger 100–240 V, 50–60 Hz, 290 W	571587

REMS Aquila



REMS Aquila 3B

REMS Aquila WB

Description	Art.-No.
REMS Aquila 3B	120270
REMS Aquila WB	120250

REMS Herkules

The sturdy support!

- Easy movement of material in all directions during turning, pulling and pushing



Description	Art.-No.
REMS Herkules 3B on tripod	120120
REMS Herkules XL 12"	120125

REMS dual purpose holder

Sawing and threading with one holder, for workbench use also

- For threading and sawing with REMS Amigo, Amigo2 and REMS Powersaws



German Quality Product



Description	Art.-No.
Dual purpose holder	543100

Order Today!

WWW.REMSTOOLSUSA.COM

SALES@REMSTOOLSUSA.COM

or call

952 432-8325




WA112023090540 USA00 - Subject to alterations and errors. © Copyright 2023 by REMS GmbH & Co. KG, Waiblingen.



OFFICIAL IMPORTER OF
REMS TOOLS

Teal Corporation
5995 149th Street West
Apple Valley, MN 55124
phone 952.432.8325
fax 952.432.3298
mail sales@remstoolsusa.com

www.remstoolsusa.com

 @remstoolsusa

Catalog No. US24

4 039976 102674

