

Patent EP 1 782 904
Super fast. Right angled.
Chip-free. No outer burr.
Dry cutting.





# REMS Akku-Cento 22V - Mobile cutting and deburring up to $\emptyset$ 115 mm. Universal for many pipe types.

REMS Akku-Cento 22 V is a compact, mobile, cordless pipe cutting machine for fast, right-angled and chipless cutting of pipes, without outside burr. The machine can be used universally for cutting plastic, metal and composite tubes. The stable, torsion-free cast construction enables fast, right angled cutting. The REMS Li-Ion 22 V technology sets standards in terms of economy and user friendliness and enables the user to cut ultra fast, e.g. stainless steel pipes with Ø 54 mm in only 7 s. The battery technology and low weight including battery of just 17.6 kg enable easy, effortless working everywhere on site. For trade and industry. For the building site and the workshop.

1 Ideal for pressfitting systems

Right angled cutting, according to requirements

Chip-free, no chips in piping system No outer burr, no damage to O-ring by outer burr

Dry, no damage to the O-ring by coolants-lubricants.

Fast, prevents degradation of pipe material through overheating.

- Compact, mobile cordless pipe cutting machine for fast, right angled, cutting with no outer burr. Handy and light, drive unit with battery only 17.6 kg. Stable, distortion-free cast construction for right angled cutting.
- 3 Easy pipe-cutting through specially designed cutter wheel.

4 Patent EP 1 782 904

Powered cutter wheel and linear advance for fast cutting

- Power saving feed-in through easy to grip, proven advance-lever and needle bearing mounted machine screw spindle.
- 6 Cutter wheel protected as movement restricted to before any contact with the rollers.
- 7 Practical handle for easy transport.
- 8 Connection for driving outer/inner pipe deburrer REMS REG 10–54 E.
- 9 For workbench, stand or wheel stand.





- An alternative feed lever is available for operating the drive unit on the floor, see accessories.
- 4 strong hardened precision tubular steel running rollers on ball bearings for low-friction turning of the pipes Ø 22–115 mm, Ø ¾-4" to be cut, trapezoidally arranged, replaceable. No setting work required in the whole working range Ø 22–115 mm. Stainless tubular steel rollers as accessory. Cutting of pipes Ø 8–22 mm by placing two pipe sections Ø 28 × 220 mm on the running rollers.

### 12 Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Powerful 21.6 V battery motor, e.g. stainless steel pipe Ø 54 mm in just 7 s. Ideal speed 84 rpm for optimum cutting speed of the pipes.

13 Safety foot-switch with emergency stop.

# 14 Li-lon 22 V Technology

Highly resistant Li-Ion 21.6 V battery with 5.0 Ah or 9.0 Ah capacity, for long service life. Light and powerful. Rapid charger for short charging times.

15 Graduated charging state display with coloured LED.

Operating temperature range – 10 to + 60 °C.No memory effect for maximum battery power.

## 17 REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Akku-Cento 22 V and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

# 18 REMS pipe deburrer

Inner pipe deburrer REMS REG 28–108 for pipes Ø 28–108 mm, Ø  $^3$ /<sub>4</sub>–4", for electric drive with the REMS Cento and REMS Akku-Cento 22 V pipe cutting machine, as an accessory. Outer/inner pipe deburrer REMS REG 10–54 E for pipes Ø 10–54 mm, Ø  $^1$ /<sub>2</sub> – 2 $^1$ /<sub>8</sub>", for electric drive with the REMS Cento pipe and REMS Akku-Cento 22 V pipe cutting machine, as an accessory.

### 19 Marking device

Marking device for marking the insertion depth for fittings on pipes, as an accessory.







# REMS Akku-Cento 22 V

**REMS Akku-Cento 22 V Basic.** Cordless pipe cutting machine for fast, right angled, cutting of pipes with no outer burr  $\varnothing$  8–115 mm. For pipes of the press fitting systems made from stainless steel, carbon steel, copper,  $\varnothing$  8–108 mm. For steel pipes EN 10255 (DIN 2440) DN 6–100,  $\varnothing$  %–4",  $\varnothing$  10–115 mm, cast pipes (SML) EN 877 (DIN 19522) DN 50–100, plastic tubes SDR 11, wall thickness s  $\le$  10 mm,  $\varnothing$  10–110 mm,  $\varnothing$  %–4", composite tubes  $\varnothing$  10–110 mm. With maintenance-free gear, powerful 21.6 V battery motor. Speed 84 rpm. Rollers in hardened precision steel pipe for pipes  $\varnothing$  22–115 mm,  $\varnothing$  %–4". Safety foot-switch. Li-lon 21.6 V, 5.0 Ah battery, Li-lon 230 V, 50–60 Hz, 70 W rapid charger. Ring spanner. Without cutter wheel. For workbench, stand or wheel stand. In a carton.

Art.-No. 845002 R220

Art.-No. 113835 R

Art.-No. 113840 R

# **Accessories**

REMS

**REMS REG 28–108**, inner pipe deburrer for pipes  $\emptyset$  28–108 mm,  $\emptyset$   $\frac{3}{4}$  – 4", for electric drive with the REMS Cento and REMS Akku-Cento 22 V pipe cutting machine (with REMS cutting wheel

REMS REG 10-54 E. Outer/inner pipe deburrer.

Art. No. 845050 or 845053).

**Stand** Art.-No. 849315 R


Wheel stand Art.-No. 849310 R

REMS Jumbo E Art.-No. 120240 R

**REMS Jumbo** Art.-No. 120200 R

REMS Herkules 3B, tripod Art.-No. 120120 R

**REMS Herkules Y**, clamping fixture for work bench Art.-No. 120130 R

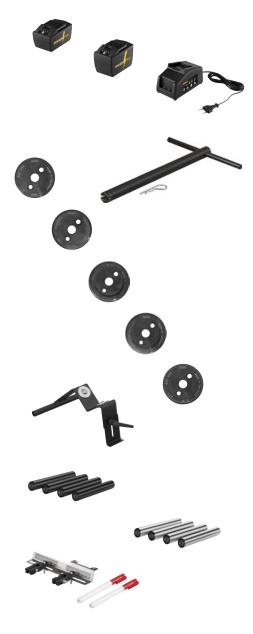

# Accessories

Battery Li-Ion 21.6 V, 5.0 Ah

Battery Li-lon 21.6 V, 9.0 Ah	ArtNo. 571583 R22
Rapid charger Li-lon 230 V, 50-60 Hz, 70 W	ArtNo. 571575 R220
<b>Feed lever</b> with spring plug for operating the drive unit on the floor.	ArtNo. 845218 R
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	ArtNo. 845050 R
REMS cutter wheel Cu specially for pipes of copper pressfitting systems	ArtNo. 845053 R
REMS cutter wheel St for steel pipes, cast iron pipes (SML)	ArtNo. 845052 R
REMS cutter wheel V for plastic and multilayer	

composite pipes, wall thickness s ≤ 10 mm Art.-No. 845051 R

REMS cutter wheel C-SF especially for pipes of the pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.

Art.-No. 845055 R

Art.-No. 571581 R22

Pipe support 1, height adjustable, for pipes  $\emptyset$  40-110 mm,  $\emptyset$  1½-4", with operation of the drive unit with feed lever on the floor

Art.-No. 845220 R

Hardened, precision tubular steel rollers (pack of 4)

Art.-No. 845118 R

Stainless tubular steel INOX rollers (pack of 4)

Art.-No. 845110 RINOX

Marking device for marking the insertion depth for fittings on pipes. For REMS Cento, REMS Akku-Cento 22 V.

Art.-No. 845530 R

Sale through specialist dealers.



# REMS (UK) Ltd.

Unit 5 · Ash Industrial Estate Flex Meadow · Harlow · Essex CM19 5TJ Phone +44 12 79 41 36 98 Fax +44 12 79 41 37 04 www.rems.de · GBR@rems.de



www.rems.de



www.youtube.com/remstools



www.facebook.com/remstools



www.twitter.com/remstools



www.instagram.com/remstools