Electric pipe freezer up to 2"

REMS Frigo 2



Electric freezing up to 2" – no laborious draining down, refilling and venting of the heating system.




REMS Frigo 2 – electrically freezing instead of draining. Super fast up to 2".

Fast, simple freezing of filled steel, copper and plastic pipes as well as composite tubes, Ø ½–2", Ø 10–60 mm. Closed refrigerant circuit. Environmentally friendly. For repair and extension of pipe systems. High cooling performance, e.g. ¾" steel pipe in just 9 min*. Very narrow, patented freezer heads, very quick fitting. Temperature display with LCD digital thermometer. Universally usable, also in enclosed spaces.

- One-size freezer heads for the core working range Ø ¼-1" / Ø 15-35 mm, no reducing inserts required.
- Aid the cooling process simply by spraying with water. Always clean freezer heads, no pastes/greases required.
- 3 Closed refrigerant circuit.
- 4 Refrigerant R-404A. High cooling capacity. Ideal also for longer repairs.
- Robust, compact. Very small deep-freezer heads fitted parallel to the pipe leaving refrigerant hoses for working in confined areas and niches also. Single or double freezing possible.
- 6 Cooling aggregate, 430 W. Very quiet.
- in sturdy sheet metal housing with ventilating side openings for optimum air circulation.
- 8 Large top compartment, easily accessible, for refrigerant hoses and accessories.
- 9 Weighs only 23 kg. Easy to carry.
- Patent EP 1 108 944, Patent US 6,434,952
 Very compact deep-freezer heads with special geometrically shaped cavities for seating different pipe diameters Very small, only 50 mm wide.

- All pipe sizes from Ø ¼-1" resp. Ø 15-35 mm can be frozen with only one deep-freezer head. Deep-freezer inserts for the rest of the capacity up to 2", 60 mm.
- Tightening straps for simple and quick assembly of deep-freezer heads onto the pipe, without tools.
- 13 Flexible, extra-long refrigerant hoses in wear resistant, synthetic rubber for large work radius.
- 14 LCD digital thermometer with clip, for exact temperature display directly at the freezing points.

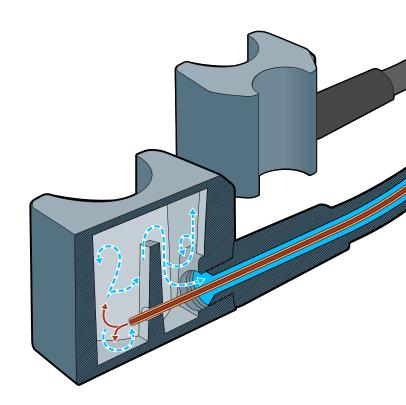



REMS Frigo 2

REMS Frigo 2 Set. Electric pipe freezing unit with closed refrigerant circuit. For steel, copper, plastic, composite pipes, Ø $\frac{1}{6}$ -2", Ø 10-60 mm. Cooling aggregate 230 V or 110 V, 50 Hz, 430 W, 2 refrigerant hoses, 2 LCD digital thermometers, 2 tightening straps, squirt bottle. Equipped for $\emptyset \frac{1}{4} - \frac{1}{4}$ ", 15–42 mm. In sturdy sheet metal housing. In a carton.

Art.-No. 131011 R220



Accessories

Extension kit up to 2", 60 mm,

consisting of 2 each of the 11/2" freezing inserts, 54 mm freezing inserts and 2" / 60 mm freezing inserts

Art.-No. 131160 R

Deep-freeze inserts 1/8", 10 mm, 12 mm (pack of 2) Art.-No. 131110 R Deep-freeze inserts 11/2" (pack of 2) Art.-No. 131156 R Deep-freeze inserts 54 mm (pack of 2) Art.-No. 131157 R Deep-freeze inserts 2", 60 mm (pack of 2) Art.-No. 131158 R

Clamping band Art.-No. 131104 R LCD digital thermometer Art.-No. 131116 R



Sale through specialist dealers.



REMS (UK) Ltd.

Unit 5 · Ash Industrial Estate Flex Meadow · Harlow · Essex CM19 5TJ Phone +44 12 79 41 36 98

Fax +44 12 79 41 37 04 www.rems.de · GBR@rems.de



www.rems.de



www.youtube.com/remstools



www.facebook.com/remstools



www.twitter.com/remstools